



SPECIFICATIONS

Fin Diameter 1.375"

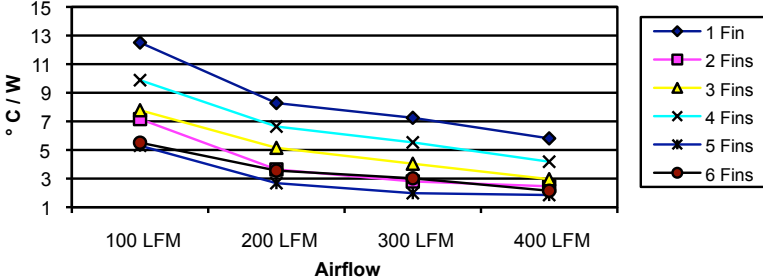

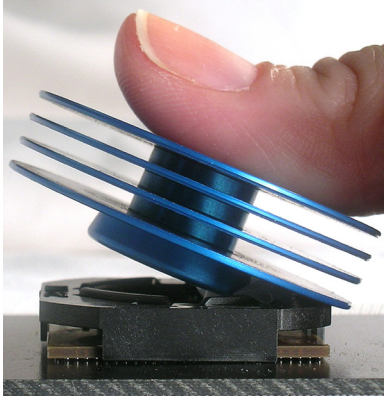

| Airflow (LFM) | 1 Fin | 2 Fins | 3 Fins | 4 Fins | 5 Fins | 6 Fins |
|---------------|-------|--------|--------|--------|--------|--------|
| 100 LFM | 11.80 | 9.31 | 8.62 | 7.98 | 6.95 | 5.95 |
| 200 LFM | 8.03 | 5.90 | 5.66 | 4.42 | 3.53 | 3.09 |
| 300 LFM | 6.43 | 4.76 | 4.21 | 3.45 | 2.72 | 2.37 |
| 400 LFM | 5.64 | 3.69 | 3.22 | 2.92 | 2.39 | 2.12 |



| Part Number | # fins | Heatsink Height | Dia Fins (in) | °C/W @100 LFM | °C/W @200 LFM | °C/W @300 LFM | °C/W @400 LFM |
|-------------|--------|-----------------|---------------|---------------|---------------|---------------|---------------|
| CGTT32511 | 1 | 0.250 | 1.375 | 11.80 | 8.03 | 6.43 | 5.64 |
| CGTT32521 | 2 | 0.357 | 1.375 | 9.31 | 5.90 | 4.76 | 3.69 |
| CGTT32531 | 3 | 0.464 | 1.375 | 8.62 | 5.66 | 4.21 | 3.22 |
| CGTT32541 | 4 | 0.571 | 1.375 | 7.98 | 4.42 | 3.45 | 2.92 |
| CGTT32551 | 5 | 0.678 | 1.375 | 6.95 | 3.53 | 2.72 | 2.39 |
| CGTT32561 | 6 | 0.785 | 1.375 | 5.95 | 3.09 | 2.37 | 2.12 |

Heat Sink Material: Aluminum
 Finish: Blue Anodized
 Clip: UL90 V0 rated, Plastic
 Thermal Pad: Provided





*The thermal data presented is for reference only. The performance can be modified for your specific application.